

SMD Power Inductor NR - 201610-Series (Alloy)



Features & Application

2020/1/1

- Metallization on Alloy core results in excellent shock resistance and damage-free durability.
- Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI).
- Fe base metal material core provides large saturation current.
- Automatic production ensures high quality and consistency.

Notebooks, desktop computers, servers, graphic cards

Blue-ray disc recorders, set top box, Automotive systems.

Portable gaming devices, personal navigation systems, personal multimedia devices

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C /85% relative humidity)

85% relative humidity)



★ When ordering, please check part number

Part Number	Inductance @1MHz,0.25V (uH)	DCR(Ω)		Isat (Max.) (A)		Irms (Max.) (A)	
		Max.	Typ.	Max.	Typ.	Max.	Typ.
ANR201610-R33M4.7A	0.33±20%	0.043	0.035	4.70	5.50	3.20	3.60
ANR201610-R47M4.0A	0.47±20%	0.049	0.041	4.00	4.70	2.70	3.10
ANR201610-R68M3.5A	0.68±20%	0.065	0.057	3.50	4.00	2.80	2.50
ANR201610-1R0M3.35A	1.0±20%	0.090	0.075	3.35	3.85	2.05	2.35
ANR201610-1R5M1.95A	1.5±20%	0.130	0.110	1.95	2.30	1.70	2.00
ANR201610-2R2M1.90A	2.2±20%	0.170	0.142	1.90	2.15	1.45	1.70
ANR201610-4R7M1.20A	4.7±20%	0.425	0.370	1.20	1.50	0.90	1.00
ANR201610-100M0.8A	10±20%	0.826	0.688	0.80	0.95	0.65	0.75

1. Isat: DC current at which the inductance drops approximate 30% from its value without current;

2. Irms: DC current that causes the temperature rise ($\Delta T = 40^\circ\text{C}$) from 25°C ambient;

3. Operating Temperature : -40°C ~ +125°C;

4. Absolute maximum voltage: DC 25V




Fig 1







Fig 2



Recommended patterns

Dimensions

A	2.00±0.25
B	1.60±0.25
C	1.05 max
D	0.90±0.2
E	0.60±0.2
F	0.60 typ
G	0.80 typ
H	1.80 typ

Fig 1

unit : mm

Impedance/Inductance/Q/

LCR Agilent E4991A

Resistance DC

Chroma 16502

Current per winding that causes a 20°C rise from 25°C ambient

Electrical specifications at 25°C

Weight 12 – 17 mg

Packaging 2000/7" reel; Plastic tape: 8 mm wide.

Packaging will different, according the various chip size.

Contact Us

US	sales-us@bing-ri.com.tw
Taiwan	sales-tw@bing-ri.com.tw
China	sales-cn@bing-ri.com.tw
Japan	sales-jp@bing-ri.com.tw


Official Website :

<https://www.bing-ri.com.tw/>

GENERAL CHARACTERISTICS

1. Operating temperature range: -40 TO +125°C (Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Ywithstanding at below conditions.
Terminal should not peel off. (refer to figure at right) 0.5kg Min -201610
4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core
6. Temperature characteristics: Inductance coefficient $(0\sim 2,000)\times 10^{-6}$ / (°C -25~+80) . °C , inductance deviation within±5.0%, after 96 hours.
7. Humidity characteristics(Moisture Resistance): Inductance deviation within ±5%, after 96 hours in 90~95% relative humidity at 40 ±2 and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within ±5%, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within ±5%, after being dropped once with 981m/s² (100G) shock attitude upon a rubber block method shock testing machine, in three different
10. Resistance to Soldering Heat: 260 , 10 seconds(See attached recommend reflow)
11. Storage environment: Storage condition: Temperature Range: 10 ~ 35 (Generally: 21 ~ 31) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range:-35 ~ 85 , Humidity Range: 50% ~ 95% RH
12. Use components within 12 months. If 12 months or more have elapsed, check soldarability before use.
13. Reflow profile recommend:

Lead-free heat endurance test

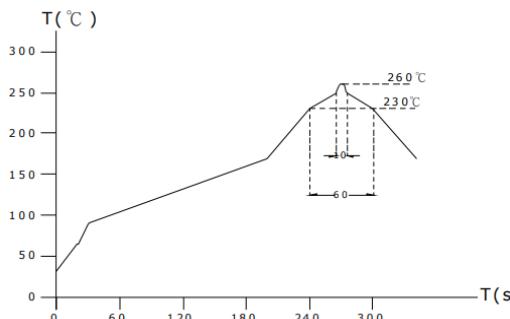

Lead-free the recommended reflow condition

