

Common Mode Choke

For High-Speed Differential Signal Line, General Differential Signal Line


**CMC F-Series**

## CMC3216F type

---

CMC3216F [1206 inch]

## ◆ SHAPE & DIMENSIONS

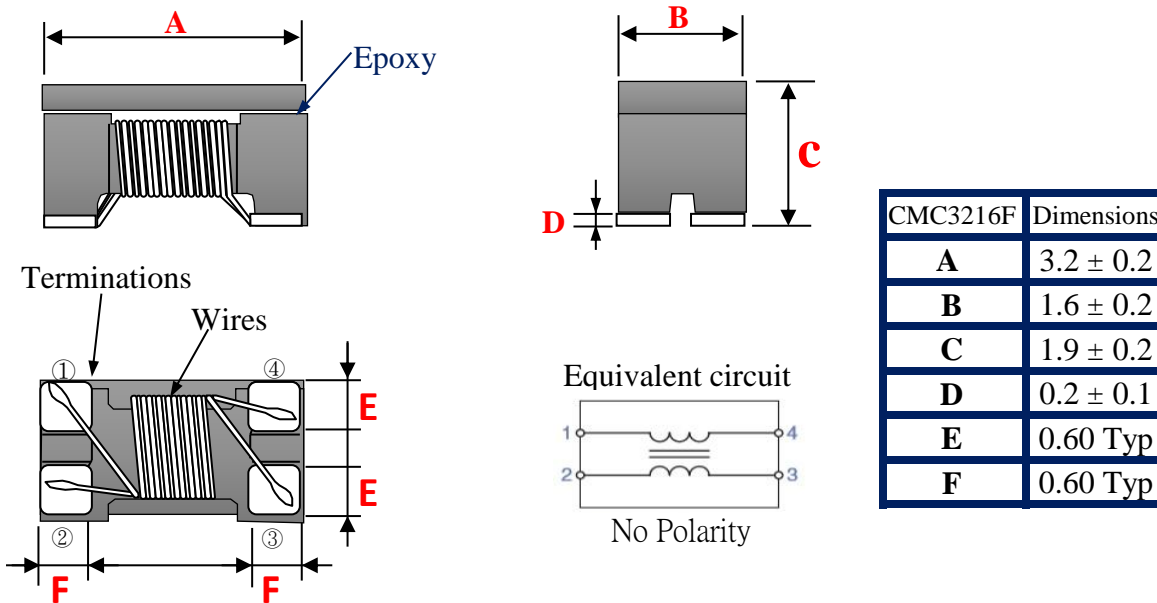

## ◆ PART NUMBER CONSTRUCTION

CMC	3216	F	900	2P	T
Series name	L*W*T Dimensions (mm)	F type Cut-Off Frequency	Impedance (Ω)at100MHz	Number Of Line	Taping
Common Mode Choke	3.2*1.6*1.9	1GHz	670	2P 2lines	
			900		
			121		
			161		
			181		
			261		
			361		
			601		
			102		
			222		

## ◆ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY.

Type	Temperature range		Reel Dimensions (mm)	Package quantity (pieces/reel)
	Operating Temperature °C	Storage Temperature °C		
CMC3216F-Series	-40 to +85	-40 to +85	φ180	2,000


## ◆ ELECTRICAL CHARACTERISTICS

Impedance 100MHz ( $\Omega$ )	DC Resistance ( $\Omega$ ) max.	Rated Voltage (V) max.	Insulation Resistance (M $\Omega$ )min.	Rated Current (A)max.	Part No.
67 $\pm$ 25%	0.25	50	10	400	CMC3216F-670
90 $\pm$ 25%	0.30	50	10	400	CMC3216F-900
120 $\pm$ 25%	0.35	50	10	370	CMC3216F-121
160 $\pm$ 25%	0.40	50	10	340	CMC3216F-161
180 $\pm$ 25%	0.40	50	10	340	CMC3216F-181
260 $\pm$ 25%	0.50	50	10	310	CMC3216F-261
360 $\pm$ 25%	0.60	50	10	290	CMC3216F-361
600 $\pm$ 25%	0.80	50	10	260	CMC3216F-601
1000 $\pm$ 25%	1.00	50	10	230	CMC3216F-102
2200 $\pm$ 25%	1.20	50	10	200	CMC3216F-222


## ◆ Measurement Equipment

Measurement Item	Meter	Manufacturer
Common Mode Impedance	E4991A / 4287A	Agilent
DC Resistance	16502	Chroma
Insulation Resistance	4339B / 19073	Agilent / Chroma

## ◆ PERFORMANCE CURVES

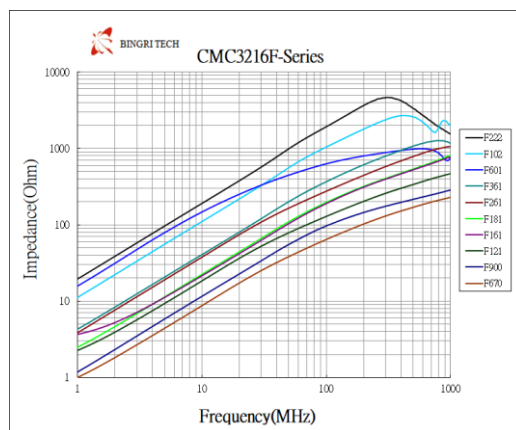

## ◆ Recommended Soldering Conditions (Please use this product by reflow soldering)

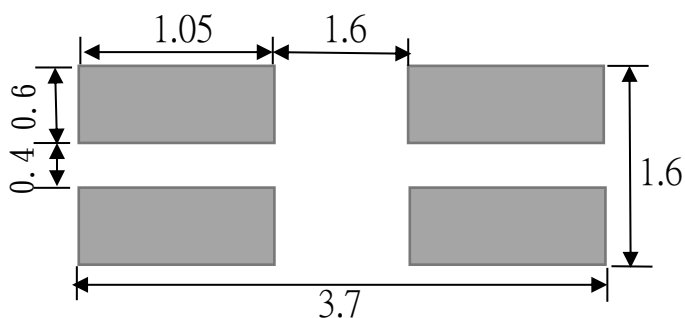


# RELIABILITY



## ◆ RECOMMENDED REFLOW PROFILE


2017/11/1

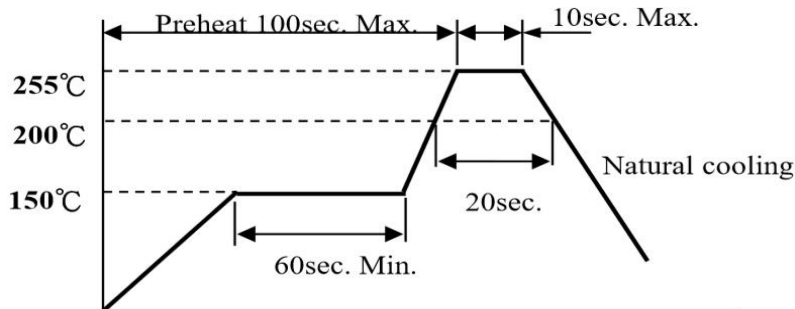


## ◆ MECHANICAL RELIABILITY

TEST ITEM	Specification & Requirement	Method Used
Solderability	The surface of terminal/pin tested shall be covered with new solder by 90%	Solder heat proof: Preheating: 150 ± 10°C 60 seconds Soldering: 245 ± 5°C for 4 ± 1 sec
Solder Heat Resistance	Components should have not evidence of Impedance: within ± 15% of initial value	Preheating: 150°C 60secs Flux: rosin Dip time: 10 ± 0.5 secs
Terminal strength	Series No.	F (Kg)
	CMC2012F/H/S	0.5
	CMC/P3216F	1.0
	CMC/P3225F	1.0
	CMC/P4532F	1.2
<b>ENDURANCE RELIABILITY</b>		
Thermal Shock	Impedance change within ± 15% Without mechanical damage	-65°C, (30 mins) -> room temp. (2 mins) 125°C, (30 mins) -> room temp. (2 mins) 50 cycles
Humidity Resistance		Apply IDC current @ 60°C ambient Humidity: 90% Duration: 168 hrs
Low Temp. Storing		Storing Temp. -40 ± 2 °C for total 168 +5/-0 hours
High Temp. Storing		Storing Temp. 125 ± 2 °C for total 168 +5/-0 hours

## ◆ Reel Dimension & Tape Dimension

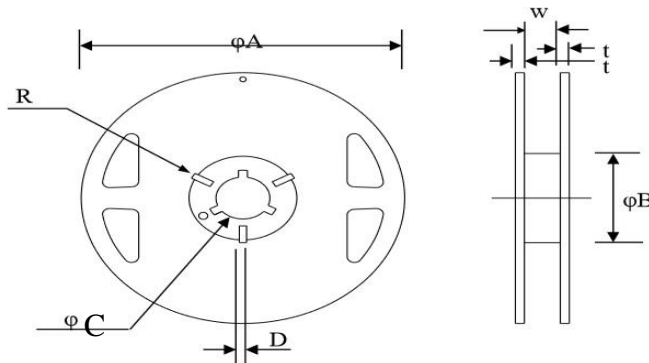

Type	A(mm)	B(mm)	C(mm)	W(mm)
7"x8mm	178±1	60±0.5	13.5±0.5	9.5±0.5
7"x12mm	178±1	60±1	13.3±0.5	13.7±0.5

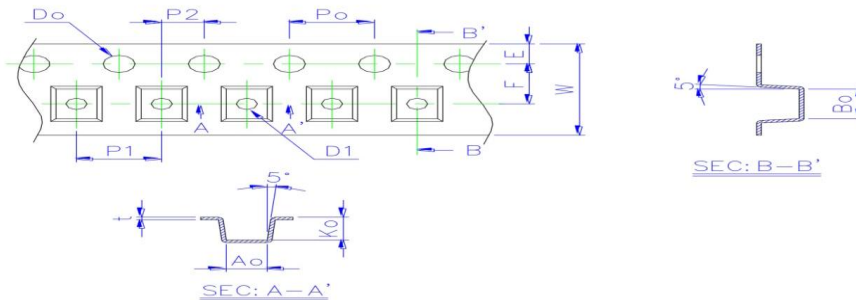

Size	Ao(mm)	Bo(mm)	Ko(mm)	W(mm)	E(mm)	F(mm)	Po(mm)	P1(mm)	Do(mm)
2012	1.50±0.05	2.35±0.05	1.45±0.05	8.00±0.20	1.75±0.10	3.50±0.05	4.00±0.05	4.00±0.10	1.50+0.10/-0.00
3216	1.88±0.05	3.50±0.05	2.10±0.05	8.00±0.20	1.75±0.10	3.50±0.05	4.00±0.05	4.00±0.10	1.50+0.10/-0.00
3225	2.88±0.10	3.65±0.10	2.50±0.10	8.00±0.10	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.10	1.50+0.10/-0.00
4532	3.45±0.10	4.90±0.10	3.05±0.10	12.00±0.20	1.75±0.10	3.50±0.05	4.00±0.05	8.00±0.10	1.50+0.10/-0.00


## ◆ Cover Tape Peel Strength

The force for tearing off cover tape is 0.05~0.69(N) in the arrow direction at the following conditions:

Temperature : 5 ~ 35°C

Humidity : 45 ~ 85%

Atmospheric pressure : 860 ~ 1060 hpa

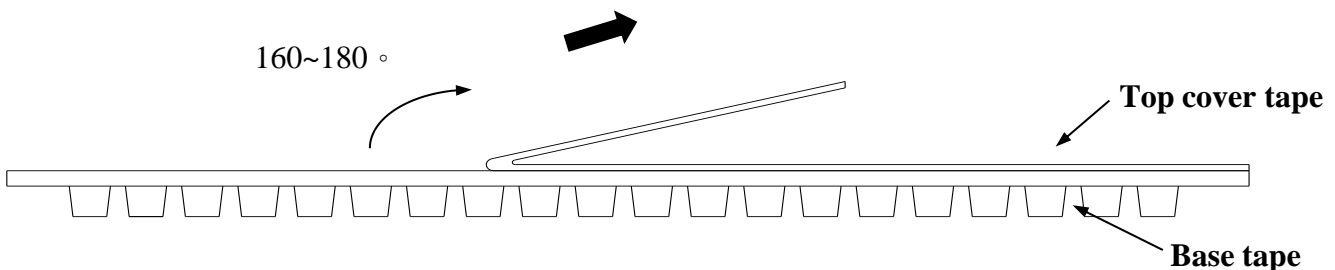

## ◆ Packaging Quantity

Chip Size	2012	3216	3225	4532
8mm / Reel	2000	2000	1000	500